

SMARTKEEPER PRO® Line Up

Universal Lock Key 3 works with

- USB Port Lock

○ USB-B Port Lock

○ USB-C Port Lock Plus

○ Link Lock

○ Link Lock Hub

○ Link On

○ Secure Drive

○ Secure Connector
- Network Port Lock Plus

○ LAN Cable Lock Plus

○ Secure LAN Cable Coupler

○ Network Module Lock 4/8/12P

○ LAN Cable Link Lock + Dedicated Cable

○ Fiber Optic LC Cable Lock Dual

○ Fiber Optic LC Cable Lock Single

○ Fiber Optic Module Lock Plus
- QSFP Port Lock

○ Serial Port Lock

○ DVI Port Lock

○ Parallel Port Lock

○ SD Port Lock

○ CF Port Lock

○ ODD Lock

○ DisplayPort Lock
- BNC Port Lock

○ RF Module Lock (Type N/M)

Lock Key Mini works with

- Mini USB-B Port Lock

○ Micro USB-B Port Lock

○ USB-C Port Lock

○ E-SATA Port Lock
- HDMI Port Lock

○ Mini DisplayPort Lock

○ RJ45 Port Lock

No key required

- USB Closing Lock

○ LAN Cable Grip

○ PC Lock (Key Type)

○ PC Lock (Combination)
- LAPTOP DOCK & LOCK

○ Laptop Lock (Combination)

○ Laptop Lock Plus (Combination)


Lock Keys

- Universal Lock Key 3
- Lock Key Mini


www.smartkeeperworld.com
Made in Korea

Items working with Universal Lock Key 3


USB Physical Security




Network Physical Security

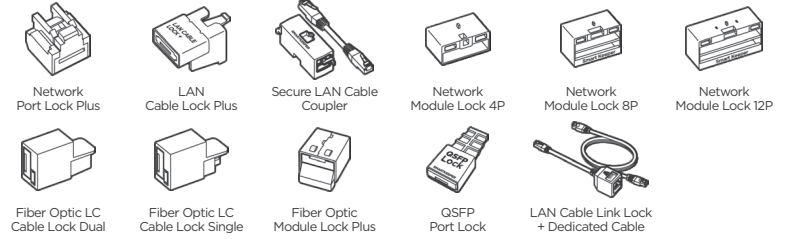

Other Physical Security

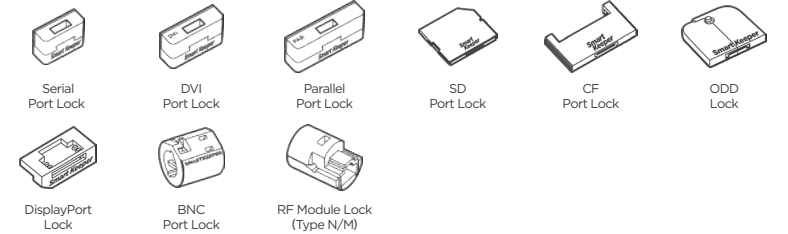

Universal Lock Key 3 How to use

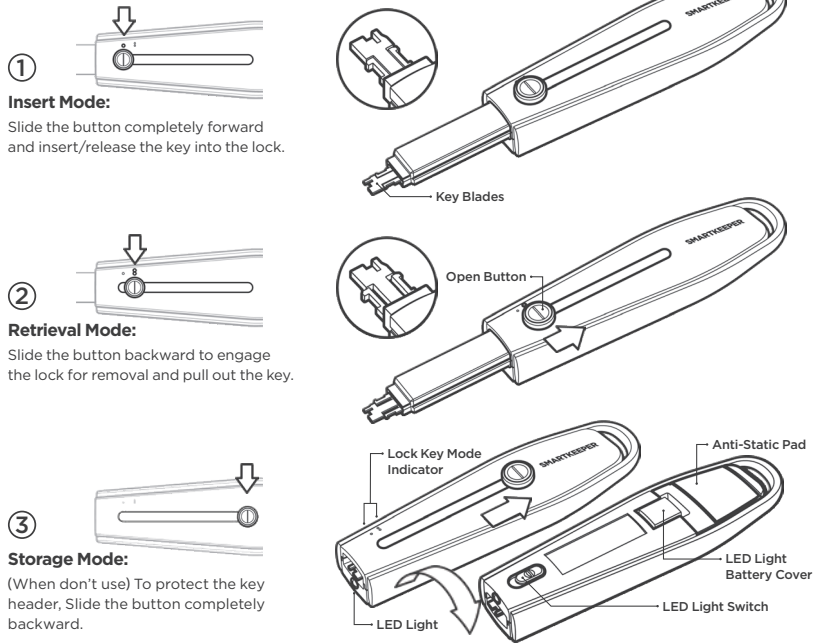


- ⚠ Caution

• Make sure that the key is carefully and fully engaged before removing lock.

• Be careful of sharp key blades. (Put the key blades into storage mode not in use.)
- ❓ Note

• The manufacturer or vendor is not responsible for any inability to check the serial number.

ODD Lock
User Guide

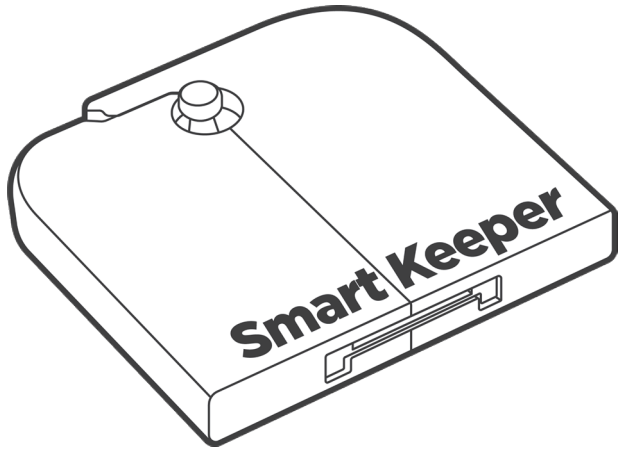

SMARTKEEPER
PROFESSIONAL

ODD Lock

ⓘ Restricts the use of optical (DVD or CD-ROM) drives.

① Environment

Optical Disc Drive (DVD/CD-ROM)

Smart Keeper

Locking Pin Hole

Lock Insert Slot

Key Slot

Components

ODD Lock Body

ODD Lock Insert

Locking Pin

Specification

ODD Lock	Width x Height x Length(Depth): 28.2 x 3.9 x 26.6mm(1.11 x 0.15 x 1.05in) Weight: 4.1g(0.14oz)
----------	---

Installation

ODD Lock

Holes on ODD tray

For small disc hole

For large disc hole

①

Depending on the size of the hole on the disc tray, choose the corresponding Locking Pin to use.

②

Insert the Locking Pin from the bottom of the disc tray.

③

Attach the ODD Lock Body to the pin.

④

Close the ODD Lock Body.

⚠ Please Note:

• Make sure to hold the Locking Pin until ODD Lock Insert has been inserted.

• ODD Lock Insert can only be inserted in one direction. (Please refer to diagram on the right)

⑤

Insert ODD Lock into the Lock Body.

⑥

After ODD Lock is securely locked in place, turn ODD Lock inward.

⑦

Push the ODD close to complete installation.

Uninstall (Removal)

ODD Lock

Key Slot

Insert Mode

①

Insert the key completely into the key slot.

Retrieval Mode

②

Slide the button backward to engage the lock.

③

Pull out the key to release ODD Lock Insert.

④

Open the ODD Locking Body to remove ODD Lock.